


SPECIFICATIONS

Model	BH-815A	BH-820A	BH-830A
Power Supply	Single Phase AC200~240V 50/60Hz		
Rated Load (kg)	250	230	180
Lifting Speed (m/min)	High	9/11	9/12
First/Last Layer	Low	2.9/3.2	3/3.7
Hook Path (m)	15	20	30
Wire Rope	$\phi 5 \times 16m$	$\phi 5 \times 21m$	$\phi 5 \times 31m$
Motor	Output (w)	600	
	Rated Current	AC 4.0A	
	Power supply	AC200~240V	
Power cable	VCT-1.25sqX3cX5m		
Main Body weight (kg)	18		
Accessories weight (kg)	4.5	5.1	6.2

Accessories: Wire Rope, Bottom Hook(Self Locking Swivel), Push Button Switch

- Safety Device**
- Over Winding Protector
 - Reverse Winding Protector
 - Slip Clutch
 - Emergency Stop Button

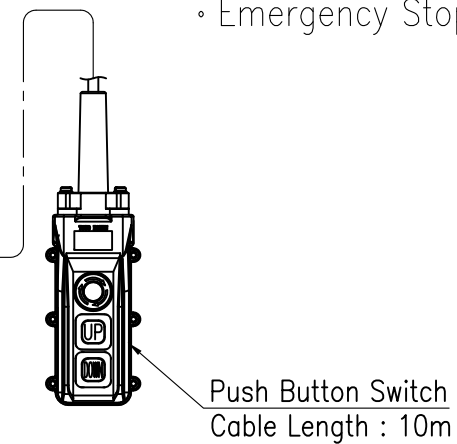

FOR REFERENCE

TYPE	BH-800A
NAME	OUTLINE
DRAWN No.	035708